



A pure and well balanced
mind a good spirit

120x180cm
Glazed Vitrified Tiles

www.reycera.com



Rey Plus, a company founded in 2003, has been manufacturing and selling integral porcelain tiles for all kinds of flooring and wall tiling solutions.

The manufacturing plant and main offices in Morbi, Gujarat IN, and the Worldwide logistics warehouses, make it possible to supply and deliver all the items in customers' orders. Through its national and international distribution network, Rey Cera exports tiles to more than 85 countries in all five continents.

As a result of our commitment to quality, all of our products comply with the guidelines of the ISO 9001:2000 standard, which guarantees that our research, development and commercializations are carried out with the maximum guarantees.

www.reycera.com



High PERFORMANCE



Hygienic
& sustainable
Surface

Scratch proof
Surface

Resistant to mould,
Mildew, and fungus

Heat
Resistance

Frost Proof
Surface

Easy to
Clean

Resistant to
chemicals, acids,
bases, and solvents

High Durability
Ultimate Strength




THE FULLY COORDINATED SOLUTION



1. Floors & Stairs
2. Shelves & Console
3. Vanity Tops
4. Table Tops
5. Commercial
6. Working Desk
7. Bathroom & Basins



1st ceramic company to introduce patented **E N D M A T C H** Concept across the world!



INTELLECTUAL
PROPERTY INDIA
PATENTS | DESIGNS | TRADE MARKS
GEOGRAPHICAL INDICATIONS



1ST
TIME
IN
WORLD

600X
600MM

600X
1200MM

800X
1600MM

1200X
1800MM

COMPLETE AND PERFECT TILING SOLUTION

1200x1800mm modularity makes our collection highly versatile.
added to the variety of designs, enhancing and stimulating
your creativity, giving room to timeless projects.
Such an eccentric thickness makes varied applications
possible. In our journey to become the most influential
tile manufacturer ever, we have discovered many
new characteristics of tiles including ASC products
through extensive research. The tiles are exceptionally
more durable.



TECHNICAL FEATURES



1200X
1800MM

infinite
possibilities

APEX BROWN / POLISHED FINISH





1200X
1800MM

infinite
possibilities

BOREX BEIGE / POLISHED FINISH





1200X
1800MM

infinite
possibilities

BOREX GREY / POLISHED FINISH






1200X
1800MM

infinite
possibilities

CALIX BIANCO / POLISHED FINISH

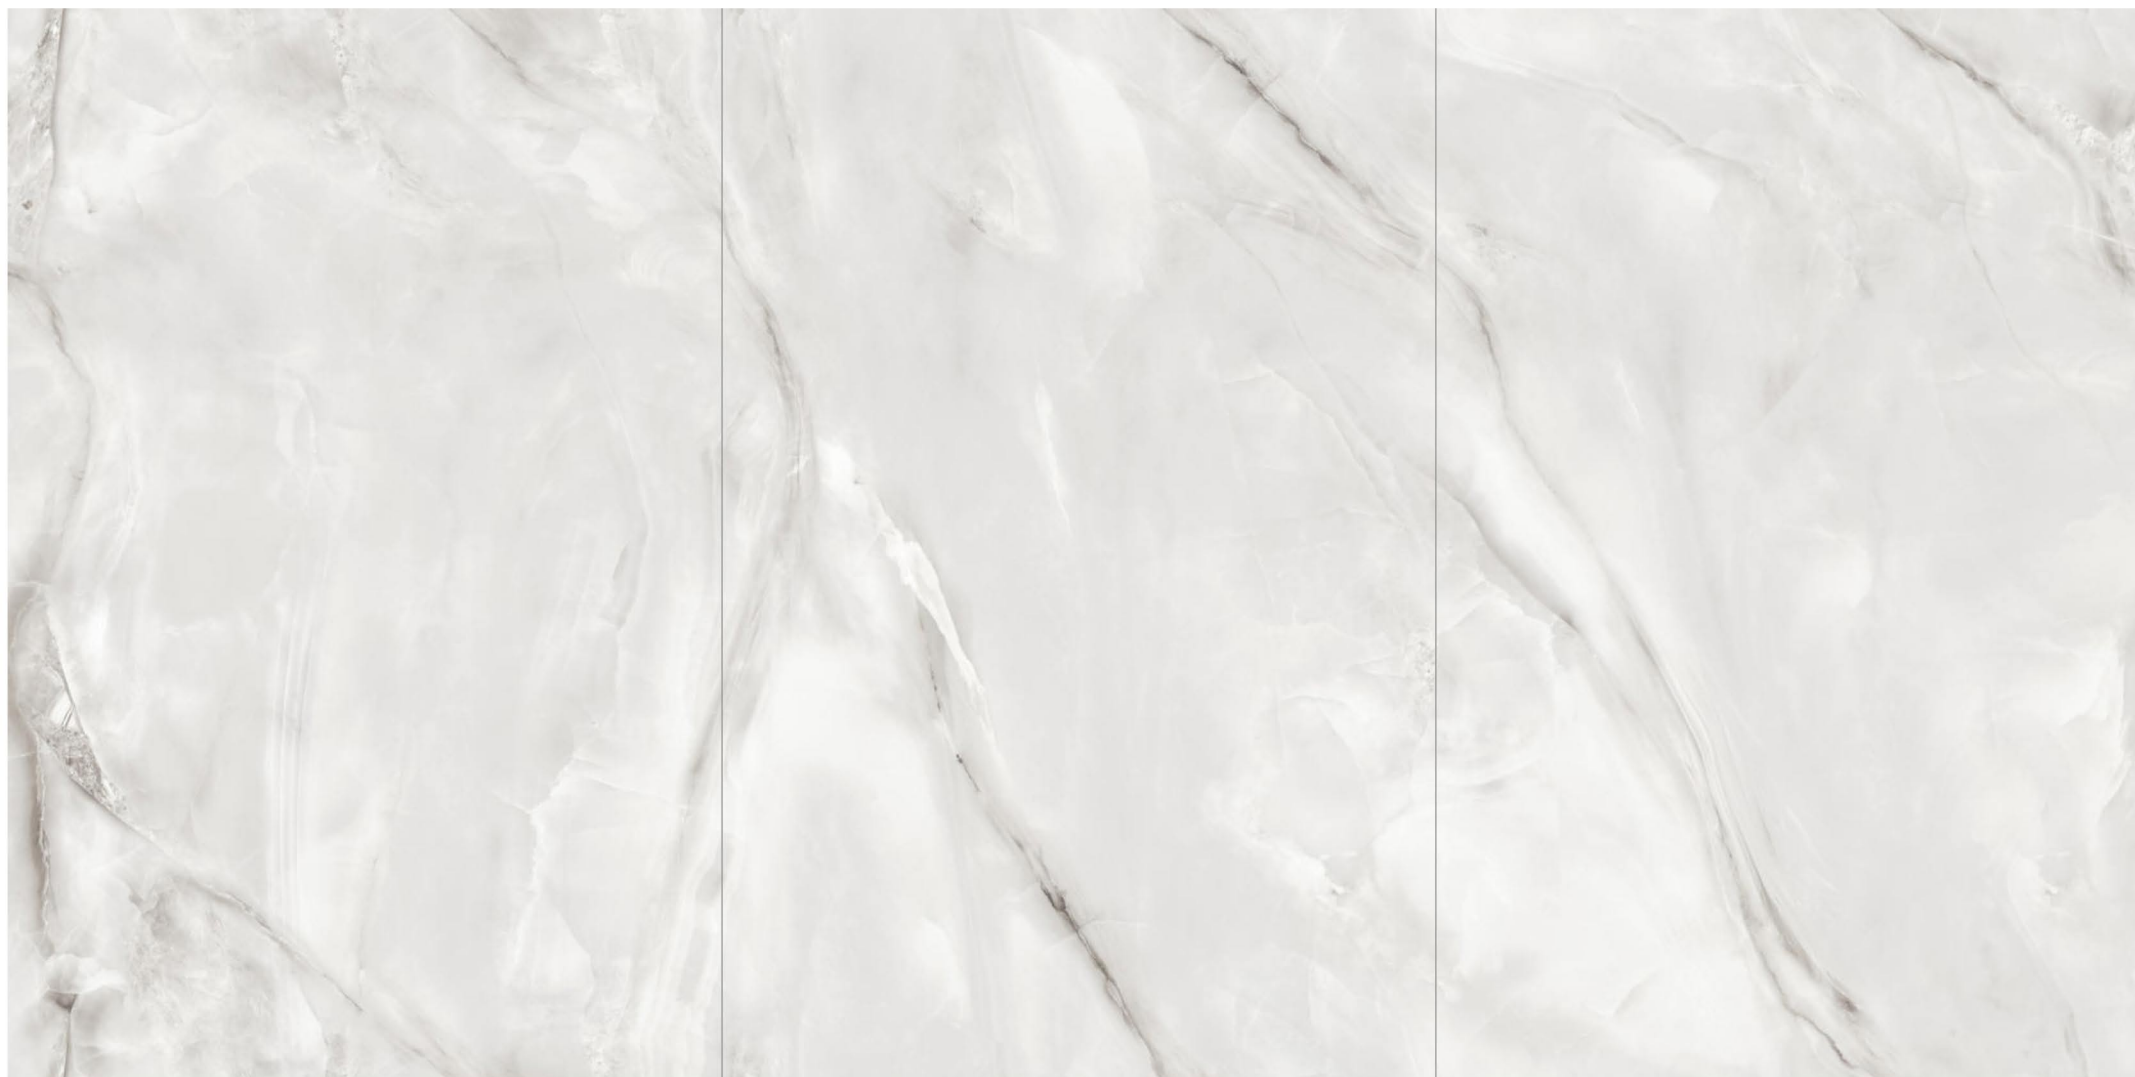




1200X
1800MM

infinite
possibilities

CALIX GREY / POLISHED FINISH

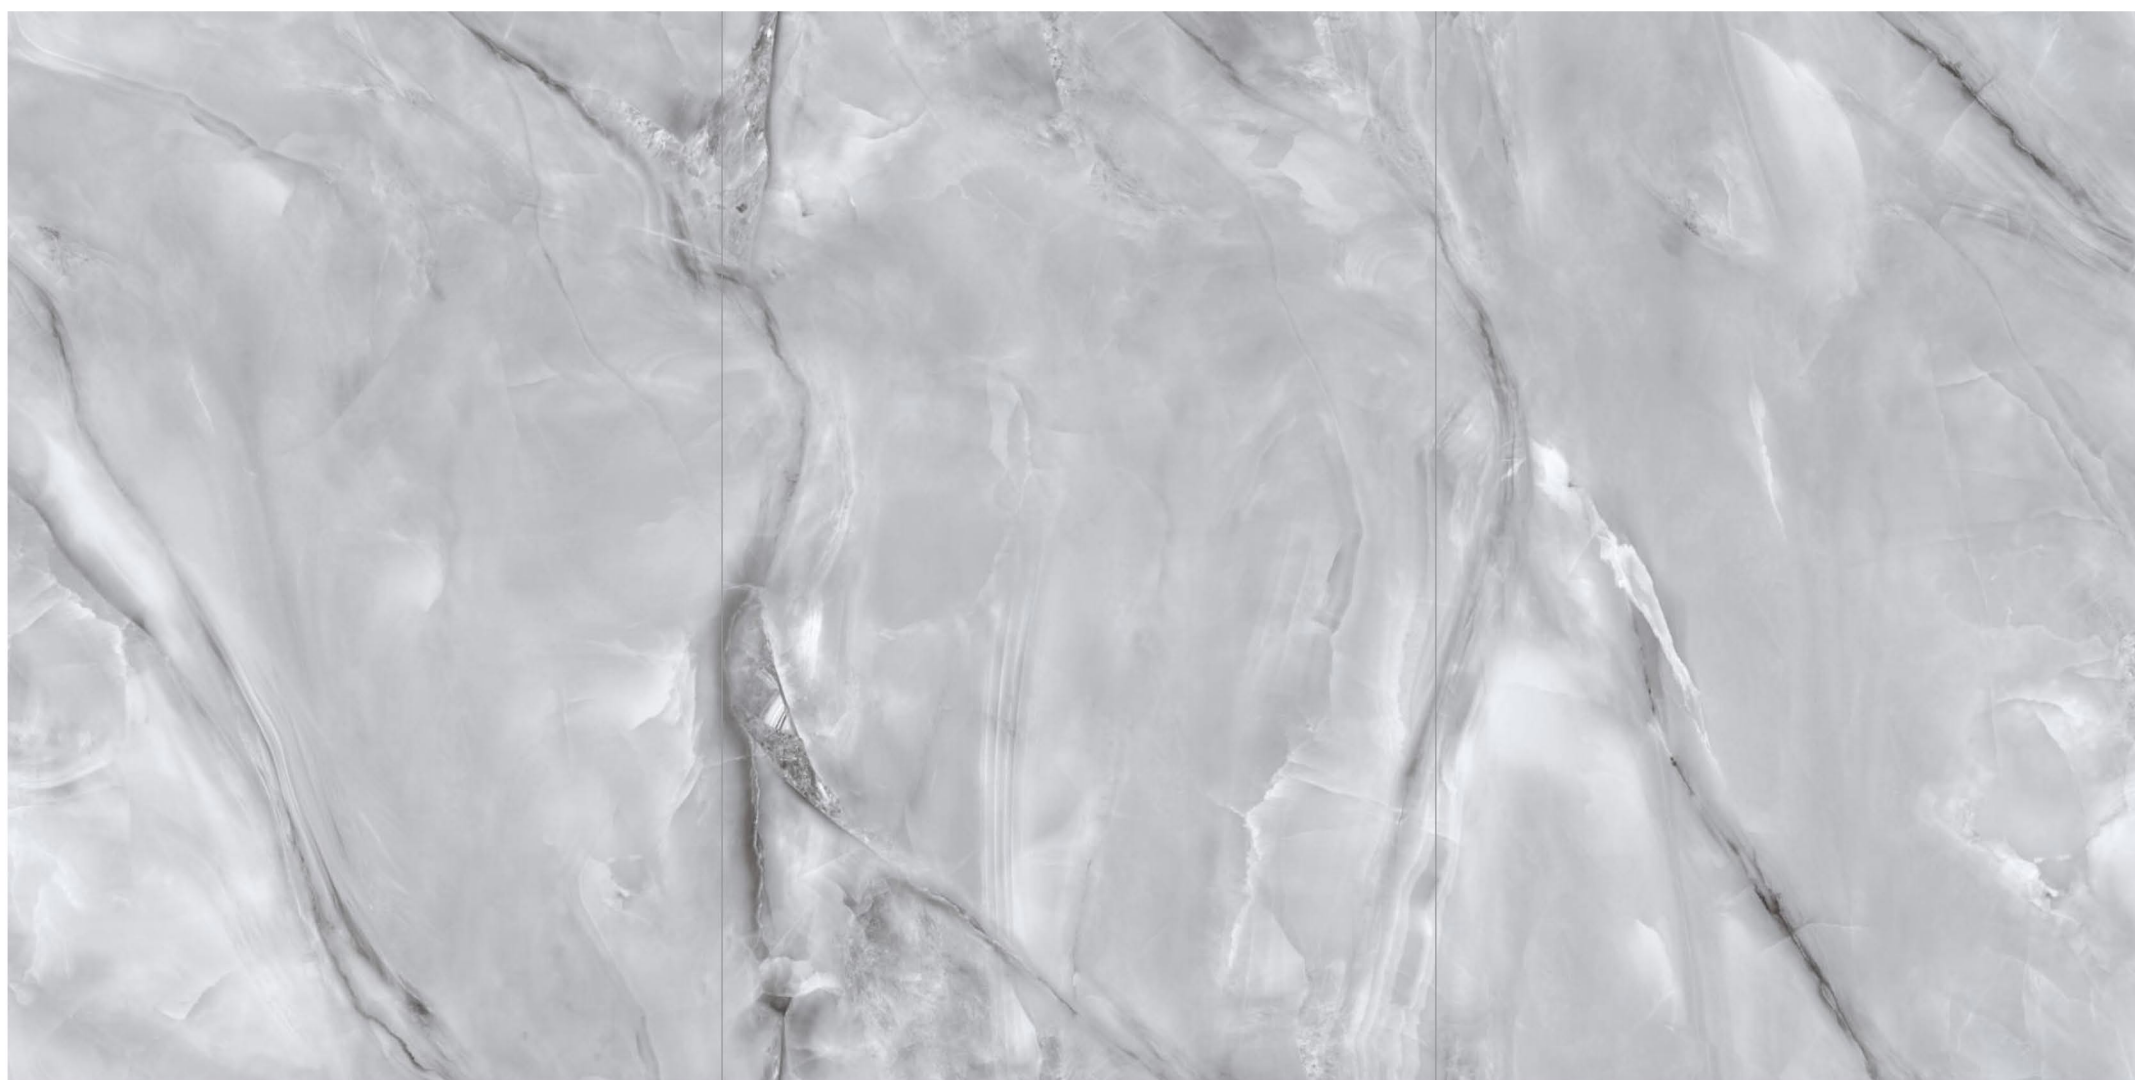



1200X
1800MM

infinite
possibilities

LAURENT BROWN / POLISHED FINISH






1200X
1800MM

infinite
possibilities

MACAEL WHITE / POLISHED FINISH

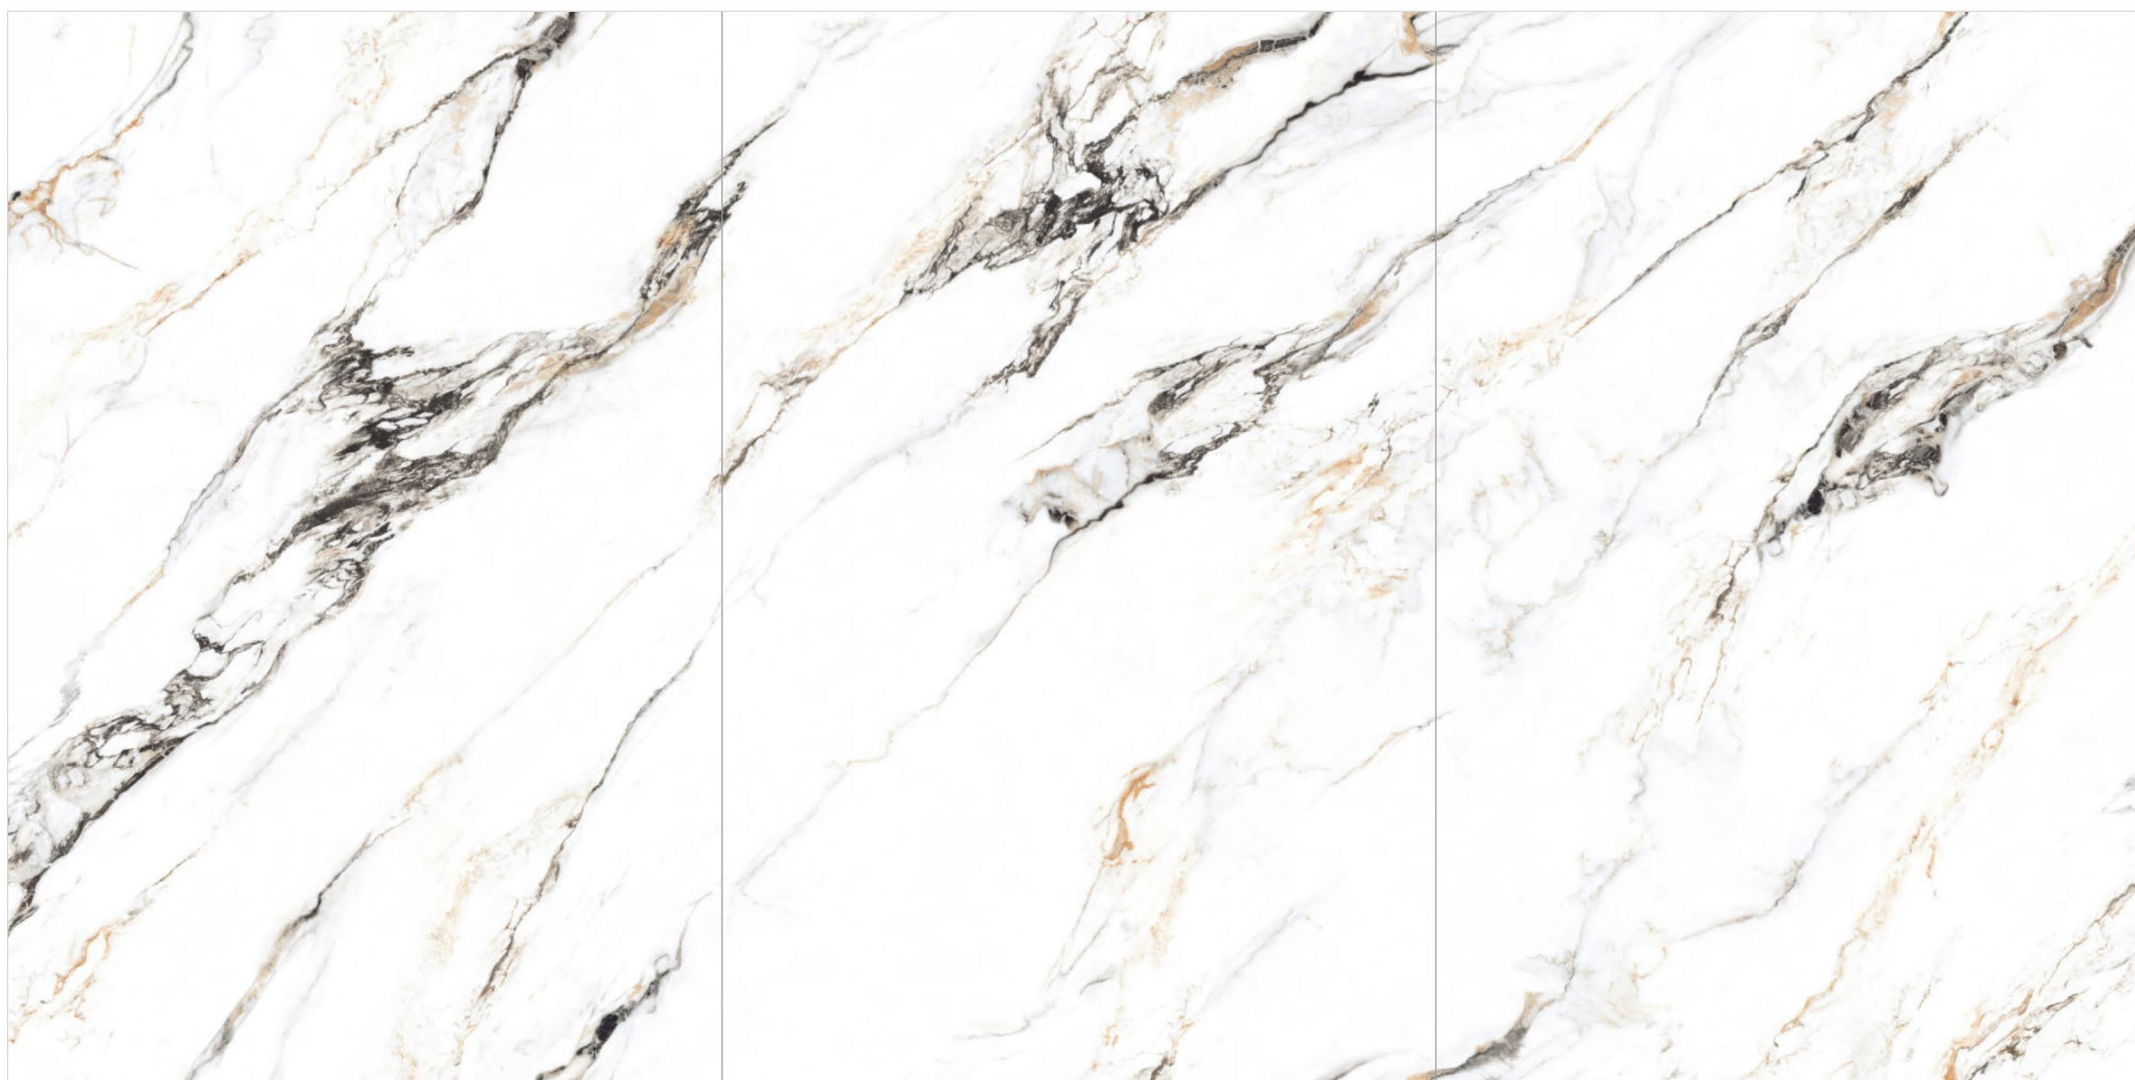



1200X
1800MM

infinite
possibilities

NEOMI ONEX / POLISHED FINISH






1200X
1800MM

infinite
possibilities

STATUARIO NEX / POLISHED FINISH

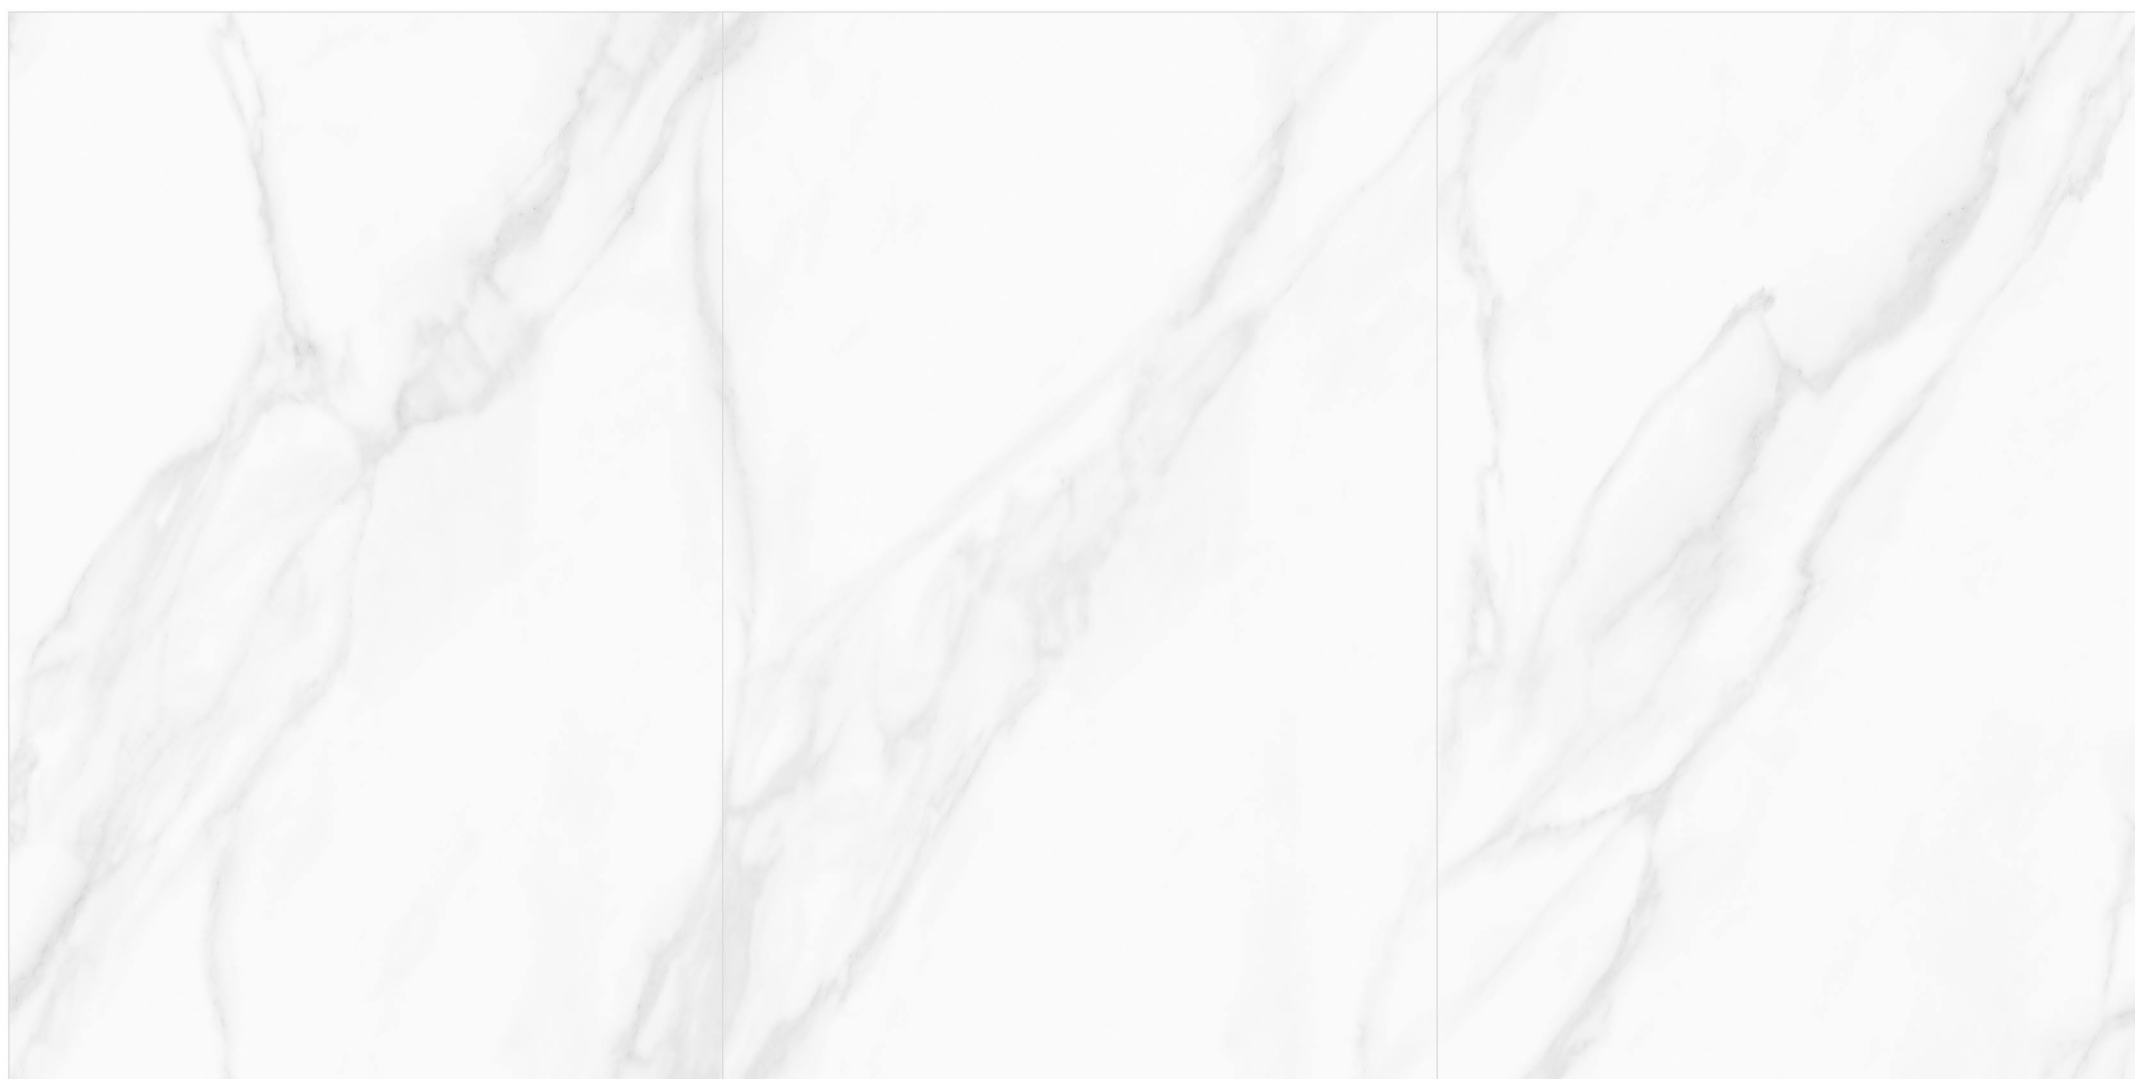




1200X
1800MM

infinite
possibilities

ULTRA ONYX GOLD / POLISHED FINISH

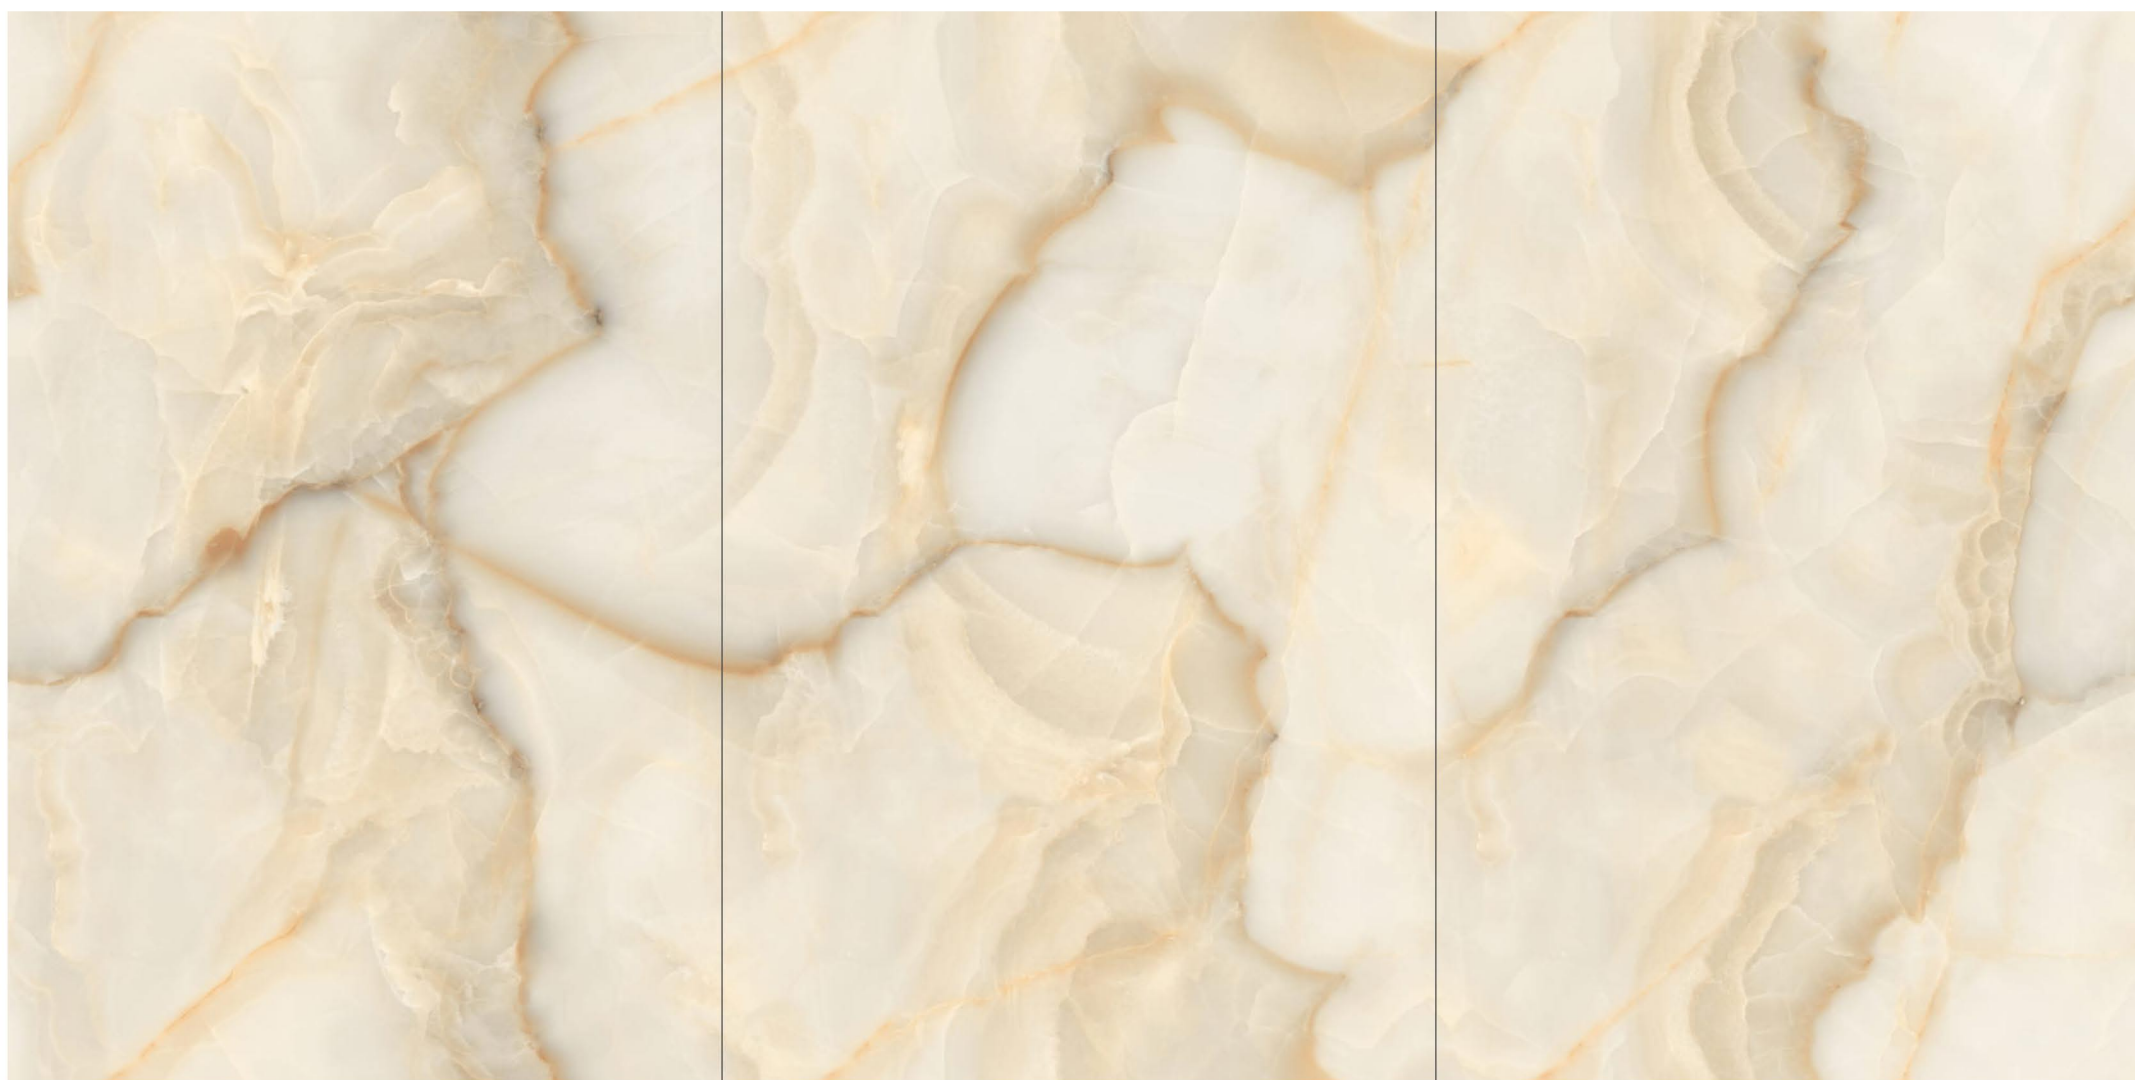



1200X
1800MM

infinite
possibilities

ULTRA ONYX GREY / POLISHED FINISH






Elegant and Luxurious
IMPRESSIVE AMBIANCE



COMPLETE AND PERFECT TILING SOLUTION


1200x1800mm modularity makes our collection highly versatile. added to the variety of designs, enhancing and stimulating your creativity, giving room to timeless projects. Such an eccentric thickness makes varied applications possible. In our journey to become the most influential tile manufacturer ever, we have discovered many new characteristics of tiles including ASC products through extensive research. The tiles are exceptionally more durable.

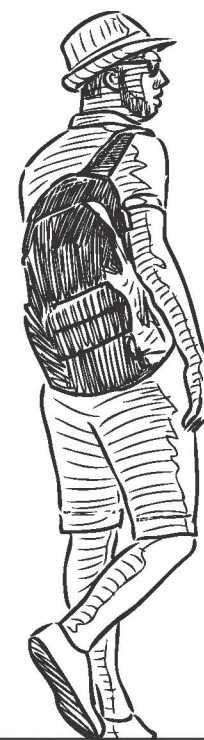

1200x
1800MM

9MM
THICKNESS

TECHNICAL FEATURES

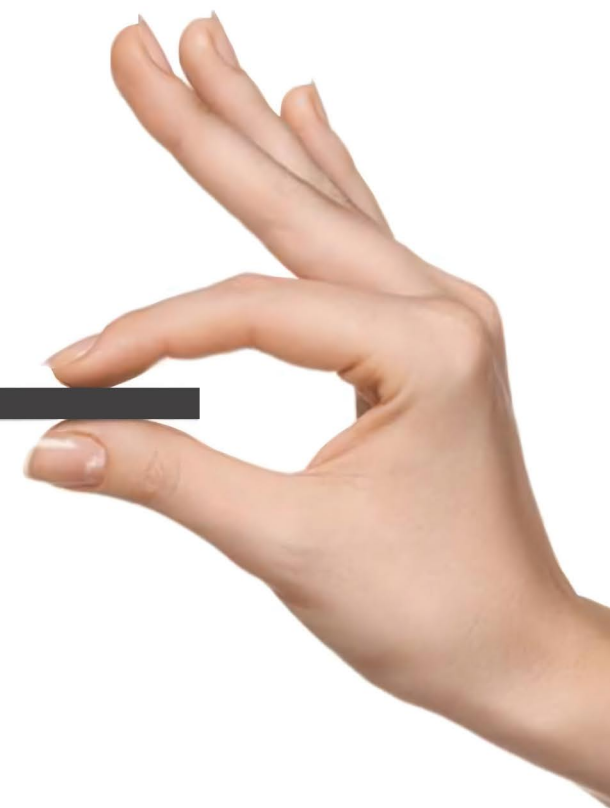

1200X
1800MM

infinite
possibilities

AMRON WHITE / ELEGANTE SURFACE






1200X
1800MM

infinite
possibilities

SIGNORINO GREY / ELEGANTE SURFACE

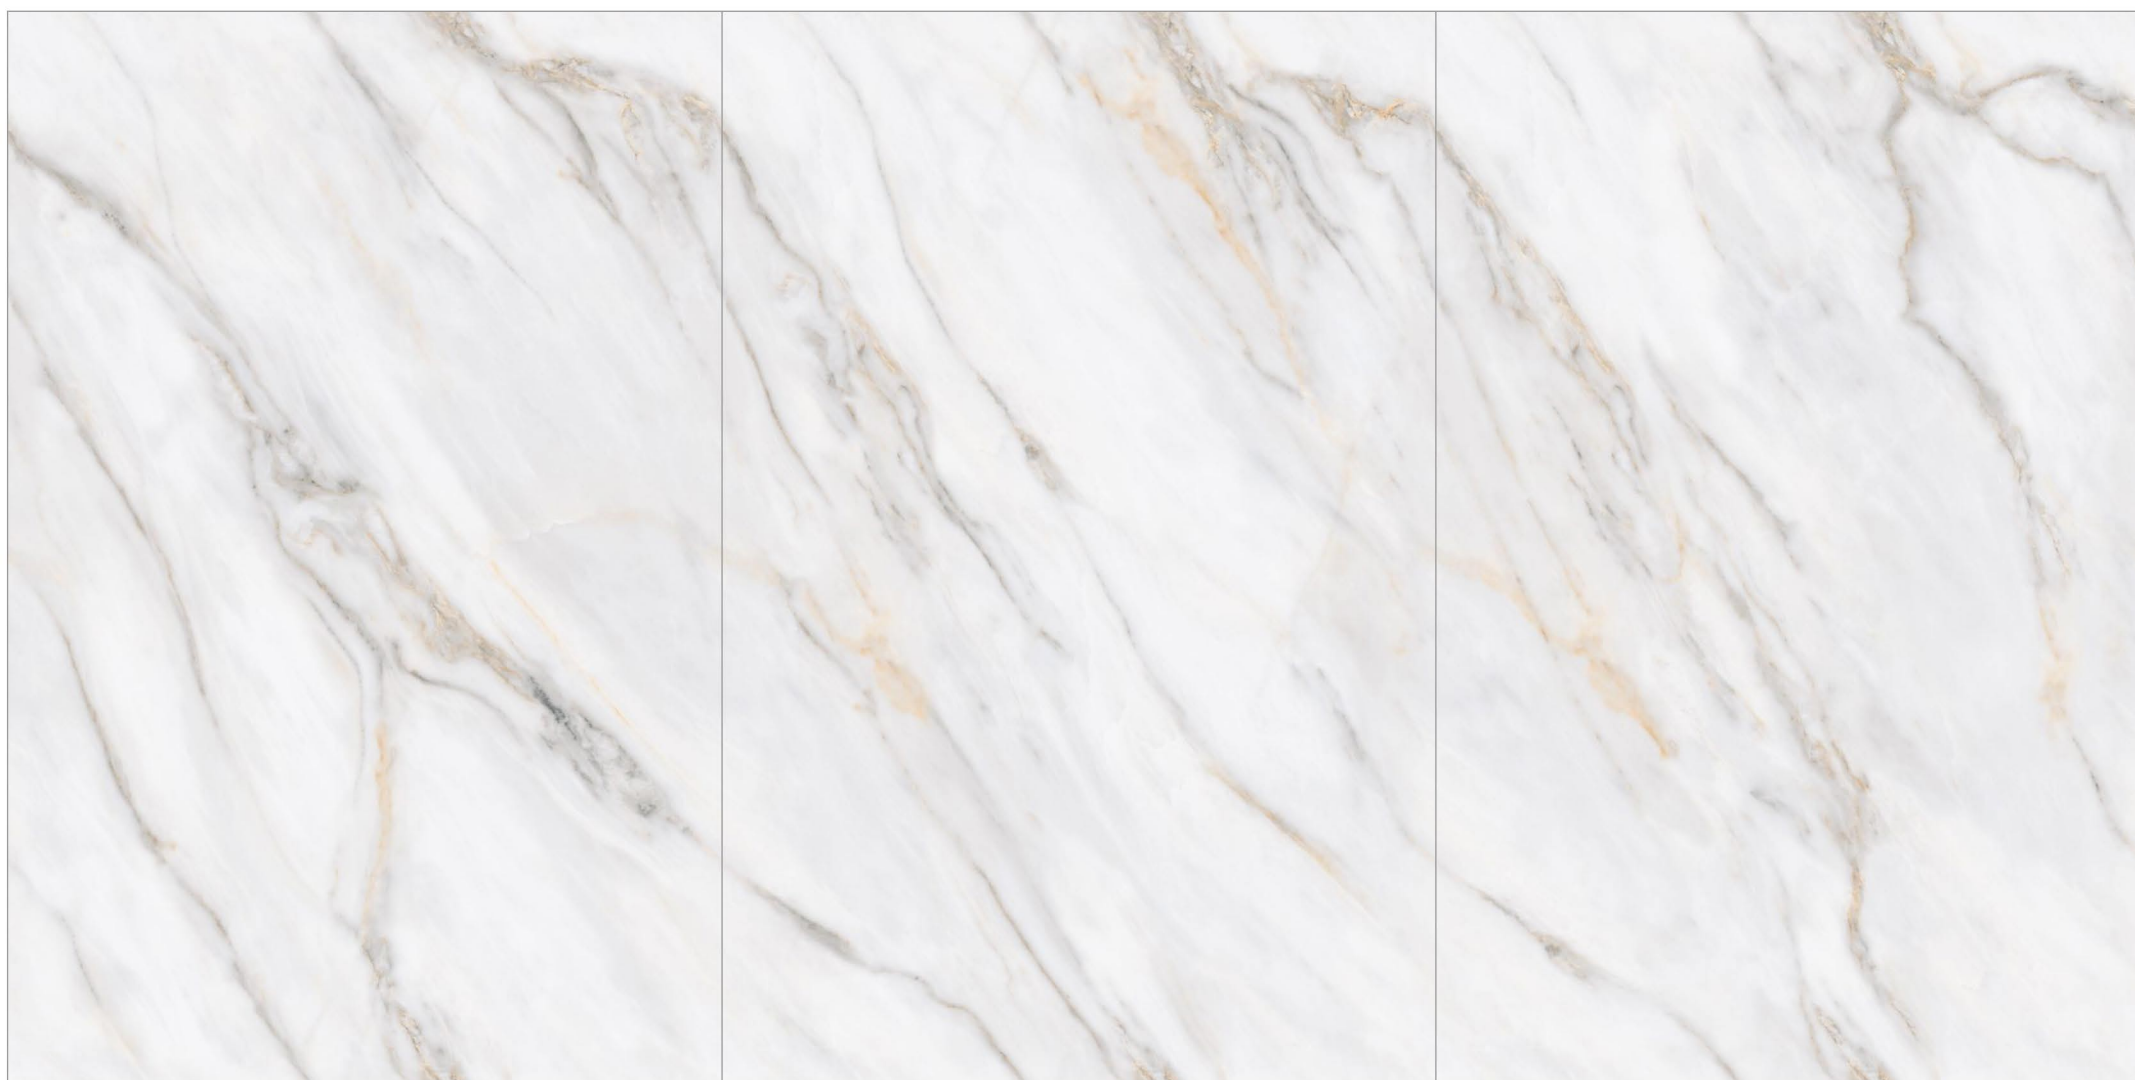



The Charm of TIMELESS PATTERN

TECHNICAL FEATURES :



ANTI SLIP
SURFACE



HYGIENIC
SURFACE



FIRE
RESISTANCE



EASY
MAINTENANCE



HIGH
DURABILITY



WATER
RESISTANCE

The surprising shine of the materials enhances the prestige and natural beauty of surfaces. We have created a timeless amazing collection that definitely meets contemporary design with unmatched elegance. Their colors and structures coordinate with one another spontaneously and are therefore always in harmony. The size range allows for enhancement of any space and offers the utmost design freedom for newly created modular solutions. These multi size installation patterns clad any surface with style and class.


**1200x
1800MM**



1200X
1800MM

infinite
possibilities

ARIANA NATURAL / ELEGANTE KRYSTALLO SURFACE

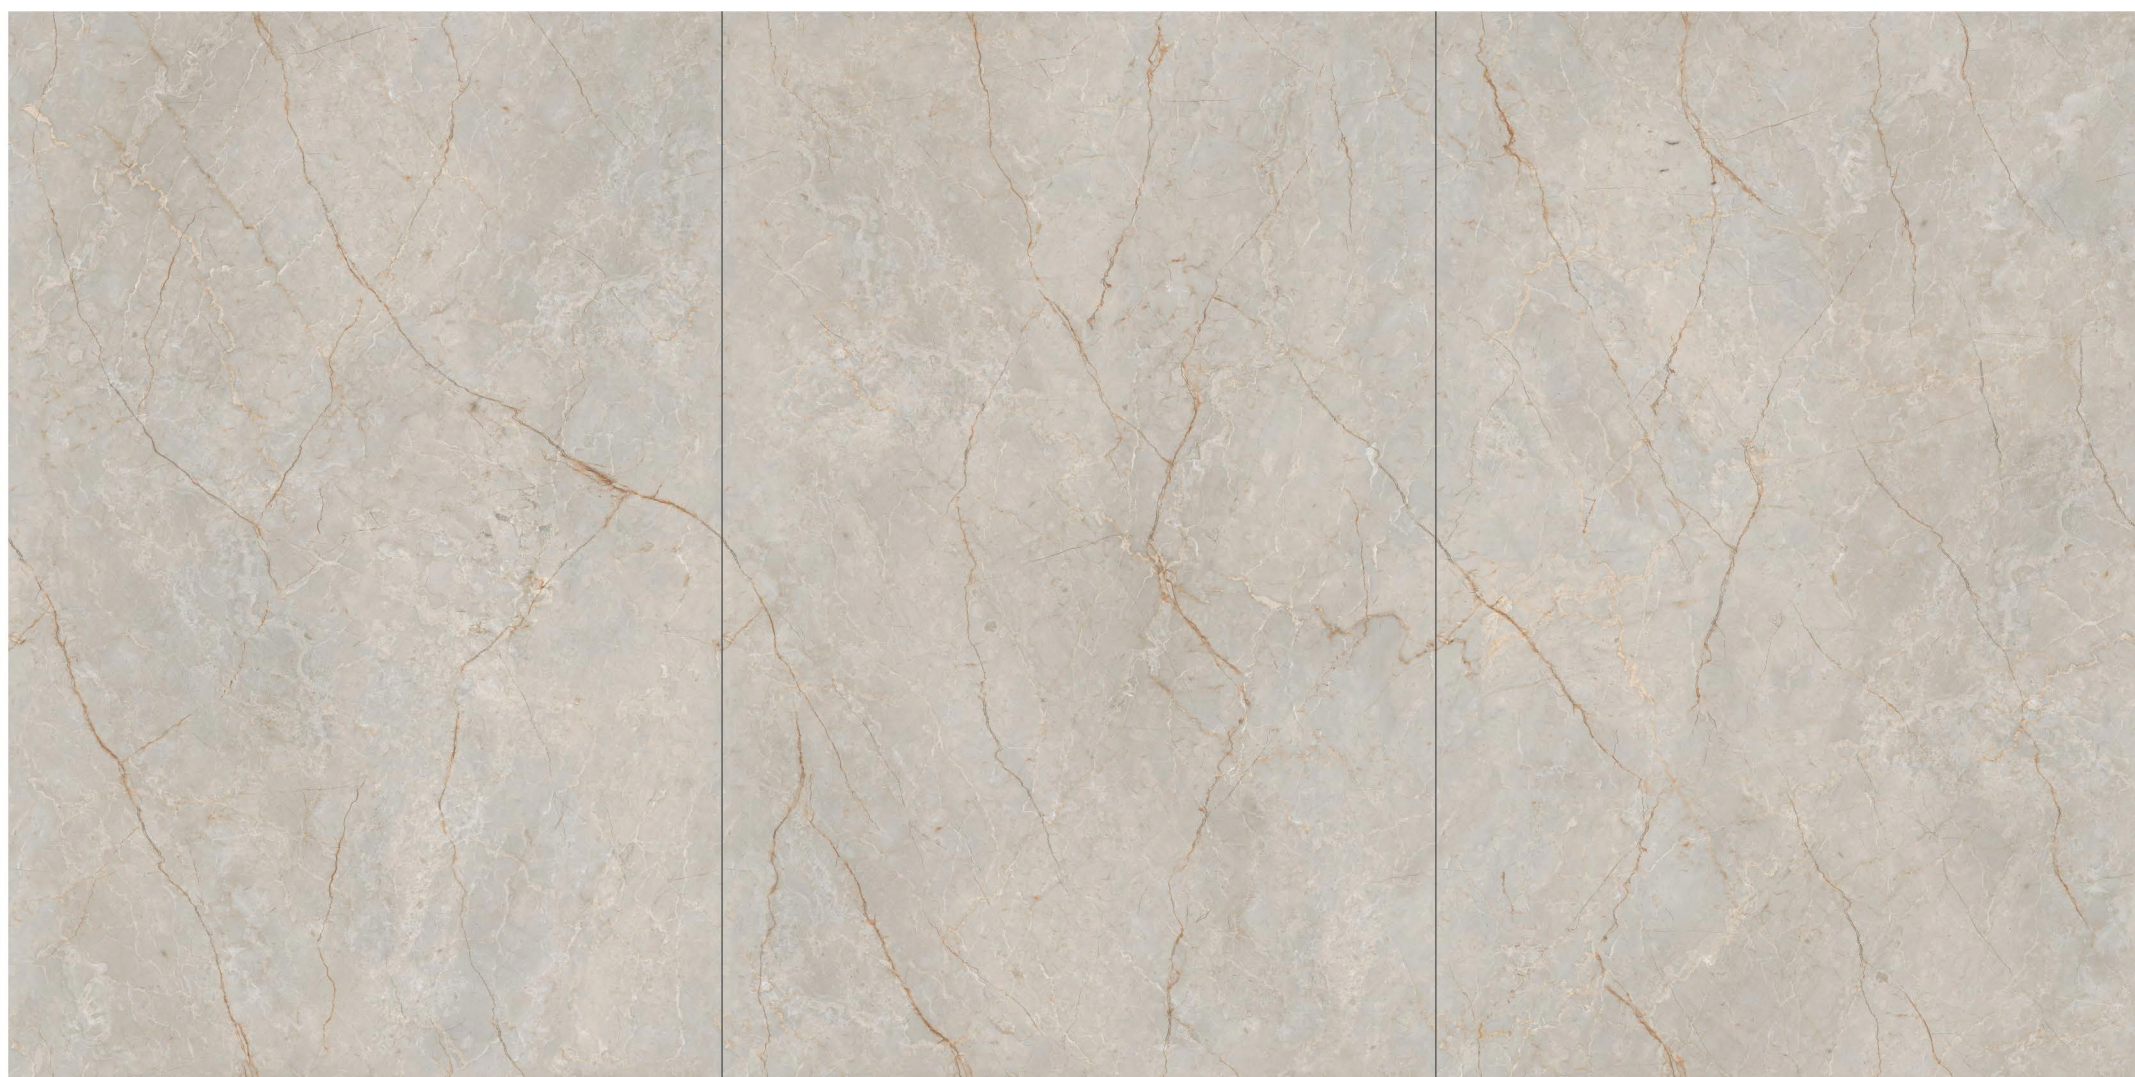



1200X
1800MM

infinite
possibilities

ARTISIAN GOLD / ELEGANTE KRYSTALLO SURFACE





1200X
1800MM

infinite
possibilities

LUXOR ASH / ELEGANTE KRYSTALLO SURFACE





1200X
1800MM

infinite
possibilities

PARSIAN BEIGE / ELEGANTE KRYSTALLO SURFACE





TECHNICAL SPECIFICATION

TEST DISCRPTION			
CHARACTERISTIC	TEST METHOD	STANDARD VALUE	REY PLUS VUEUES
Deviation in Length	ISO 10545-2	3 1 mm	Ave. + 0.28 mm Ave. - 0.00 mm
Deviation in Width	ISO 10545-2	31 mm	Ave. + 0.21 mm Ave. - 0.00 mm
Deviation in Thickness	ISO 10545-2	3 0.5 mm	Ave. + 0.00 mm Ave. - 0.16 mm
Straightness of Sides	ISO 10545-2	3 0.8 mm	Max. + 0.18 mm Max. - 0.20 mm
Rectangularity	ISO 10545-2	3 0.8 mm	Max. + 0.20 mm Max. - 0.22 mm
Surface Flatness	ISO 10545-2	3 1.8 mm	Max + 0.14 mm Max - 0.00 mm
Surface Quality	ISO 10545-2	Min. 95%	Min. 99%

PHYSICAL PROPERTIES			
CHARACTERISTIC	TEST METHOD	STANDARD VALUE	REY PLUS VUEUES
Water Absorption	ISO 10545-3	0.50%	Avg. 0.0606 %
Modulus of Rapture(N/mm2)	ISO 10545-4	min 35	Avg. 43.11 N/mm2
Breaking Strength(N)	ISO 10545-4	>7.5mm	6270.45 N
THERMAL SHOCK RESISTANCE 15/145.C 10cycle	ISO 10545-9	10 cycle, Min	Conform
Co-Efficent of Linear Thermal Expansion	ISO 10545-8	9x10 6 Max	4,84x10 6
Deep Abrasion Resistance	ISO 10545-6	Max 175mm	123mm3
Scratch Hardness of Surface	Is-13630-13	Min 5 Moh's	5 Moh's Scal
Bulk Density (g/cc)		2.2 Min	2.2748g/cc
Moisture Expansion(mm/m)	ISO 10545-10	0.02mm/m max	No Expansion
Impact Resistance-Coefficent of Restitution	ISO 10545-5	0.55 Min.	0.57 Min
Small Colour Differences	ISO 10545-16		No Difference
Resistance to Stain	ISO 10545-14	Min Class-3	Class-5
Lead and Cadium Release in mg/dm2	ISO 10545-15	0.1mg/dm2	0.00mg/dm2

PACKING DETAIL				
SIZE	THICKNESS	NO. OF SLAB/BOX	WEIGHT/BOX	COVERAGE AREA
1200 x 1800 mm	9.5 mm _(approx)	2 Pcs.	91 KG _(approx)	46.50 Sq. ft.

RECOMMENDED APPLICATION AREAS

RESIDENTIAL BUILDINGS - INTERIOR

Bedroom

Kitchen

Bath

Dining

Living Area

RESIDENTIAL BUILDINGS - EXTERIOR

Elevation Wall

Lift Facia

Terrace

Balcony

Foyer

COMMERCIAL AREAS

Office

Bank

Restaurant
Cafe, Pub, Bar

Hotel, Resort,
Spa, Gym

Shop, Store
Showroom

LIGHT COMMERCIAL AREAS

Hospital & Clinic

School & Collage

Banquet Hall

Religious Place

IT Park

HEAVY COMMERCIAL AREAS

Shopping Mall
Super Market

Airport
Terminal

Theater
Multiplex

Railway / Bus
Station

Food Park
Apparel Park

EXTERIOR AREAS

Facades

Wall Paneling

Veranda

Porch

Elevation

WET AREAS

Shower Area

Public
Restroom

Swimming
Pool Deck

Bathroom

Kitchen



REY CERA EXIM

Office No.: C-10, Eden ceramic City,
Opp. Honest Hotel, 8-A N.H.,
At. Lalpar - 363642, Dist. Morbi,
Gujarat - (INDIA)

Mob.: +91 98791 00953

WEB: www.reycera.com